MEF EMC-Filter 3-phase 1-stage I:8A U:3x600 VAC book-style

Current: 8 A

Image



Vicarious picture

Approvals



Technical Data			
Operating voltage	max. 3 × 600 V AC		
Operating frequency	5060 Hz		
Overload current	18 × IN t < 0.5 ms; 1.5 × IN t < 1 min. (1 × per hour)		
Consumption at 250 V AC	max. 10 mA		
Test voltage	L - N: 3.3 kV DC, 2 s; L - L: 3.1 kV DC, 2 s		
Connection diameter	0.210 mm² single core (AWG 247); 0.26 mm² multiple core (AWG 249)		
General data			
Connection	Screw connection, touch protected		
Climatic category	25/85/21 (EN 600068-1)		
Mounting method	screw fixing, M5		
Dimensions H × W × D	250 x 90 x 100 mm		
Description			
	The 3-phase and one-stage EMC filters MEF 3/1 are used in the range 0.130 MHz and dampen interferences found in cables		
	from the mains, supply units and control systems. They are suitable for TN-C- and IT mains. The best results are obtained with		
	short connection cables (suggestion: earth connection < 10 cm) of the largest possible cross-section. The EMC filters are		
	bi-directional. They reduce symmetrical and asymmetrical interferences that regularly appear with electronically controlled		
	three phase units through mains influences.		
Commercial data			
Net weight	1300		
Net weight	1300		
Weight unit	gram		
Basic unit	pc.		
Customs tariff number	85363010		
Unit (piece)	1		
Limited value	1		

All data on this data sheet was compiled carefully.

Liability regarding correctness, completeness, and actuality is limited to gross negligence. Created: 06/12



stay connected



stay connected

Accessories		ArtNo.
	Grounding strip 16mm ² 200mm for M6 Tinned copper	4000-71001-1620006
	Grounding strip 35mm ² 200mm for M6 Tinned copper	4000-71001-3520006
Comments		
	Attended to a second and a second	

Attenuation curves on request.

All data on this data sheet was compiled carefully. Liability regarding correctness, completeness, and actuality is limited to gross negligence. Created: 06/12 L1 0

Ó


C

⊕₀

L2

L3

Circuit diagram

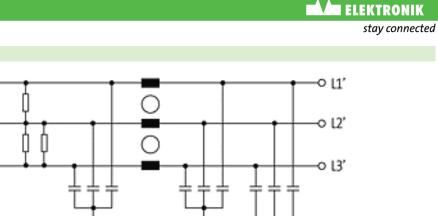

R

₀⊕

All data on this data sheet was compiled carefully. Liability regarding correctness, completeness, and actuality is limited to gross negligence. Created: 06/12

Representante oficial de:



[Argentina – Uruguay – Paraguay – Bolivia – Colombia – y Perú.]



Calle 49 N° 5764 - Villa Ballester (B1653AOX) - Prov. de Buenos Aires - ARGENTINA Tel: (+54 11) 4768-4242 / Fax: (+54 11) 4849-1212 Mail: ventas@nakase.com.ar / Web: www.nakase.com.ar