

MIRO 6,2MM Opto-coupler module with isolation link IN: 53 VDC - OUT: 250 VAC / 0,5A

Triac 0.5 A
24 V DC
Spring clamp terminals

Image


Vicarious picture


Input	
LED display	LED (yellow)
Voltage range ON	10...53 V DC
Voltage range OFF	0...5 V DC
Control current	7 mA
Output	
Switching current	0.1 mA...0.5 A
Switching voltage	24...250 V AC
Saturation voltage (across output)	<= 1.5 V AC
Leakage current (when output is open)	<= 0.3 mA
Switching time ON/OFF	10/10 ms
Switching frequency	max. 20/1 Hz (resist./ind.)
General data	
Test isolation voltage	2.5 kV
Temperature range	-20...+60 °C
Housing	Plastic black, flame retardant
Mounting method	DIN-rail mountable (EN 60715)
Dimensions H x W x D	78 x 6.2 x 65 mm
Commercial data	
Net weight	22
Net weight	22
Weight unit	gram
Basic unit	pc.
Customs tariff number	85414090
Unit (piece)	1
Limited value	1

All data on this data sheet was compiled carefully.


Liability regarding correctness, completeness, and actuality is limited to gross negligence. Created: 06/12

Accessories		Art.-No.
	Wiring accessorie plug link	90961
	Wiring accessorie red spacing 6,2 mm	90976
	Wiring accessorie end cap red	90982
	Wiring accessorie blue spacing 6,2 mm	90975
	Wiring accessorie end cap blue	90980
	Wiring accessorie 16 pole cross-section: 1 mm ²	90977
	Control systems Label plate Miro	90901


Circuit diagram

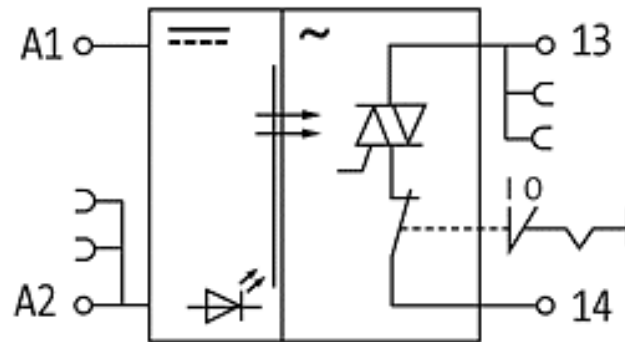

Dimension drawing

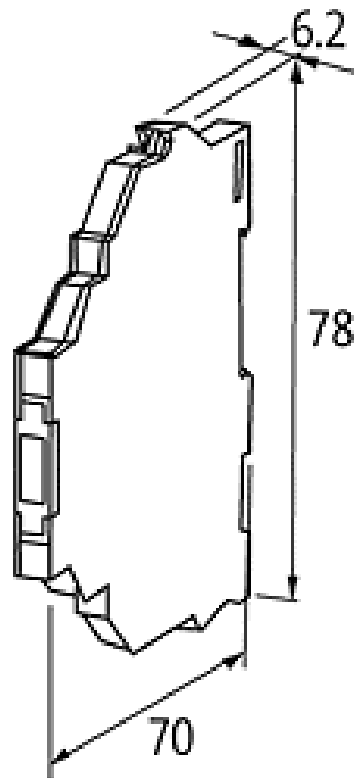

De-rating curve

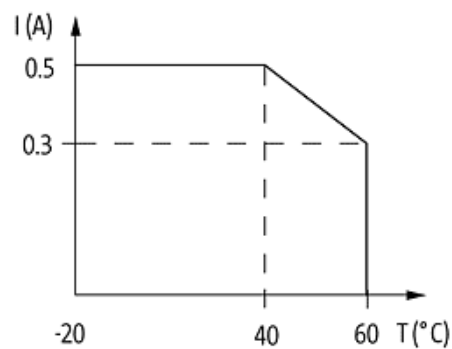

Representante oficial de:



[Argentina – Uruguay – Paraguay – Bolivia – Colombia – y Perú.]



Calle 49 N° 5764 - Villa Ballester (B1653AOX) - Prov. de Buenos Aires - ARGENTINA
Tel: (+54 11) 4768-4242 / Fax: (+54 11) 4849-1212
Mail: ventas@nakase.com.ar / Web: www.nakase.com.ar

