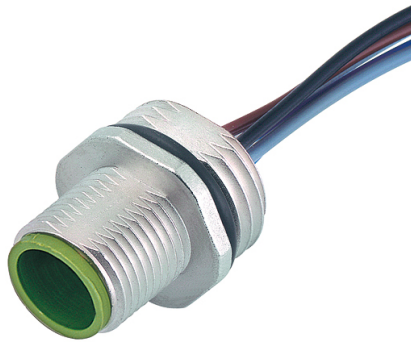


M12 male receptacle A-cod. front mount PP-wires 5x0,34 0,2m

Flange M12 male
with multi-strand wire
5-pole

Image

Vicarious picture


| | |
|---------------------------------------|---|
| Form | 13521 |
| Technical Data | |
| Operating voltage | max. 125 V AC/DC |
| Operating current per contact (40 °C) | max. 4 A |
| Locking of ports | screw thread M12 × 1 mm (recommended torque = 0.6 Nm) self-securing |
| Protection | IP65 and IP67 when plugged and screwed down (EN 60529) |
| Temperature range | -25...+85 °C |
| Cable | |
| No./diameter of wires | 5 × 0.34 mm ² |
| Wire isolation | PP (br, wh, bl, bk, gr) |
| C-track properties | Max. Externe Vorsicherung 20 A (T) in der Gebäudeinstallation |
| Outer diameter | approx. 3.4 mm |
| Bend radius (mobile) | 10 x outer diameter |
| Temperature range (fixed) | -40...+80 °C |
| Commercial data | |
| Net weight | 16 |
| Net weight | 16 |
| Weight unit | gram |
| Basic unit | pc. |
| Customs tariff number | 85444290 |
| Unit (piece) | 1 |
| Limited value | 1 |
| Accessories | Hexagonal nut M16x1,5 for receptacle |
| | Art.-No. 7000-13581-0000000 |

All data on this data sheet was compiled carefully.


Liability regarding correctness, completeness, and actuality is limited to gross negligence. Created: 06/12

Contact layout

Male

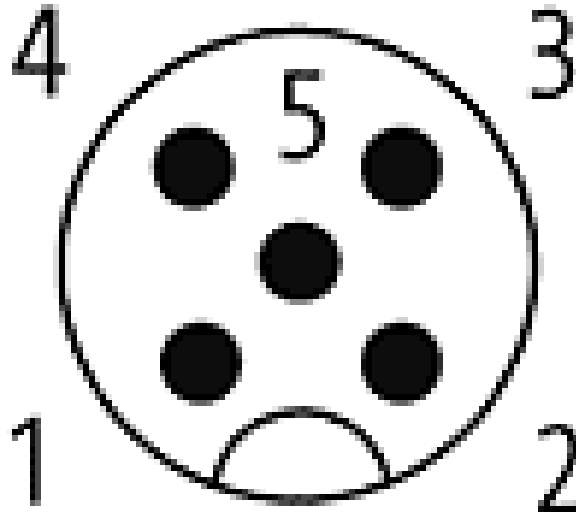

Dimension drawing

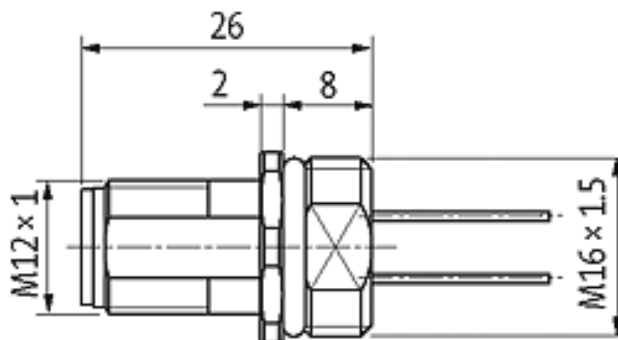

Representante oficial de:



[Argentina – Uruguay – Paraguay – Bolivia – Colombia – y Perú.]



Calle 49 N° 5764 - Villa Ballester (B1653AOX) - Prov. de Buenos Aires - ARGENTINA
Tel: (+54 11) 4768-4242 / Fax: (+54 11) 4849-1212
Mail: ventas@nakase.com.ar / Web: www.nakase.com.ar

