

Push Pull RJ45 with cable, Profinet PUR-OB 2x2x0,34 shielded green UL, CSA 1,5m

Push Pull, RJ45
Male straight
4-pole, shielded

Image

Vicarious picture

Bus technologies

EtherNet/IP
performance tested

PROFI
NET

EtherCAT

Form

99631

Technical Data

Operating voltage	max. 50 V AC
Operating current per contact (20 °C)	max. 1.75 A
Protection	IP65 and IP67 when plugged and screwed down (EN 60529)
Locking of ports	Push Pull
Temperature range	-40...+70 °C, depending on cable quality

Cable

No./diameter of wires	2 × 2 × 0.34 mm ²
Wire isolation	PE (wh, ye, bl, or)
C-track properties	Max. Externe Vorsicherung 20 A (T) in der Gebäudeinstallation
Jacket	PUR (UL/CSA)
Outer diameter	approx. 6.7 mm
Bend radius (mobile)	12 × outer diameter
Temperature range (fixed)	-40...+80 °C
Temperature range (mobile)	-20...+60 °C

All data on this data sheet was compiled carefully.

Liability regarding correctness, completeness, and actuality is limited to gross negligence. Created: 06/12

Commercial data

Net weight	169
Net weight	169
Weight unit	gram
Basic unit	pc.
Customs tariff number	85444290
Unit (piece)	1
Limited value	1


Comments

Further cable lengths on request.
Plastic housings with good resistance against chemicals and oils.
The resistance to aggressive media should be individually tested for your application. Further details on request.


Contact layout

Male


6 3 2 1

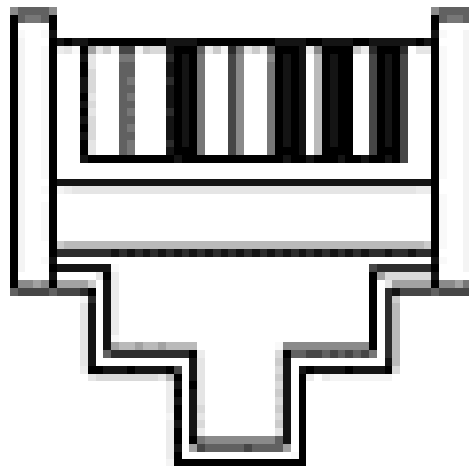

Circuit diagram

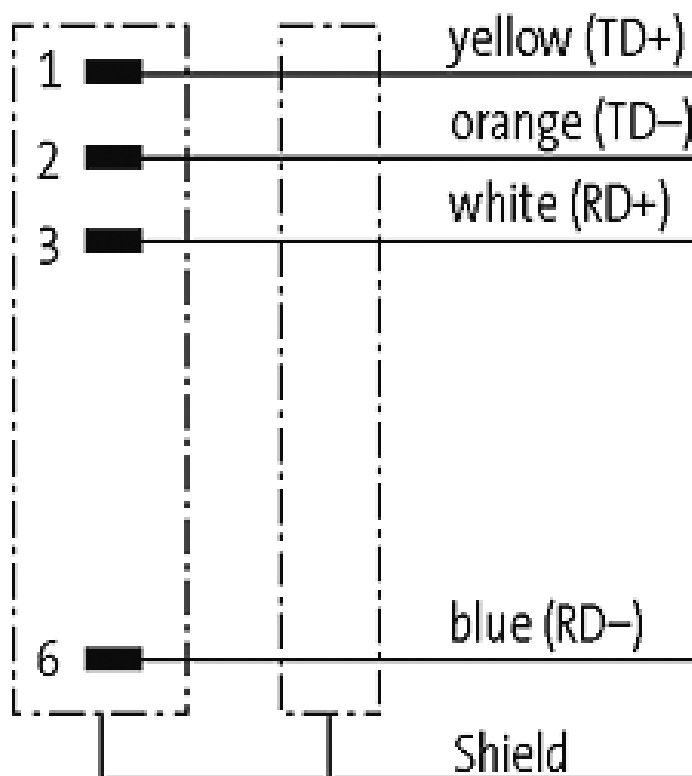

Dimension drawing

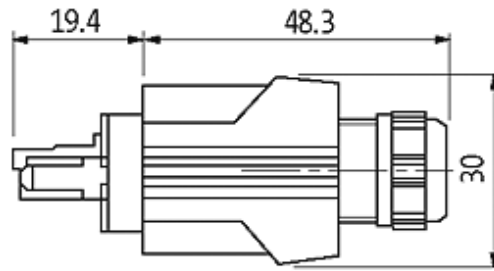

Height: 22 mm

Representante oficial de:



[Argentina – Uruguay – Paraguay – Bolivia – Colombia – y Perú.]



Calle 49 N° 5764 - Villa Ballester (B1653AOX) - Prov. de Buenos Aires - ARGENTINA
Tel: (+54 11) 4768-4242 / Fax: (+54 11) 4849-1212
Mail: ventas@nakase.com.ar / Web: www.nakase.com.ar

