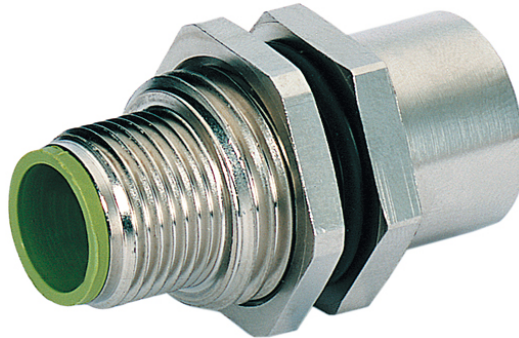


M12-Schaltschrankdurchführung 8pol A-cod

Control cabinet entry system M12
A-coded, 8-pole, shielded

Image

Vicarious picture

Form

48111


Technical Data

Operating voltage	max. 24 V AC/DC
Operating current per contact (40 °C)	max. 1.5 A
Mounting set	M16 × 1.5 mm
Temperature range	-25...+85 °C
Protection	IP65 and IP67 when plugged and screwed down (EN 60529)


Commercial data

Net weight	27
Net weight	27
Weight unit	gram
Basic unit	pc.
Customs tariff number	85369010
Unit (piece)	1
Limited value	1


Contact layout

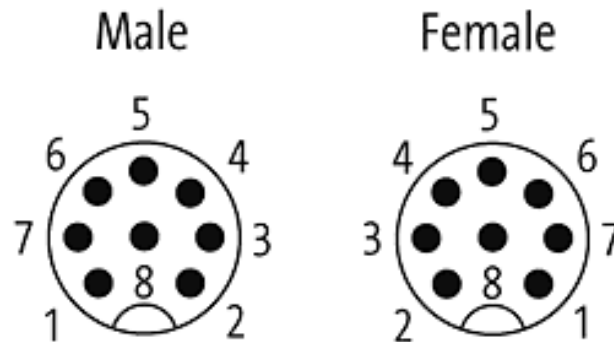

Circuit diagram

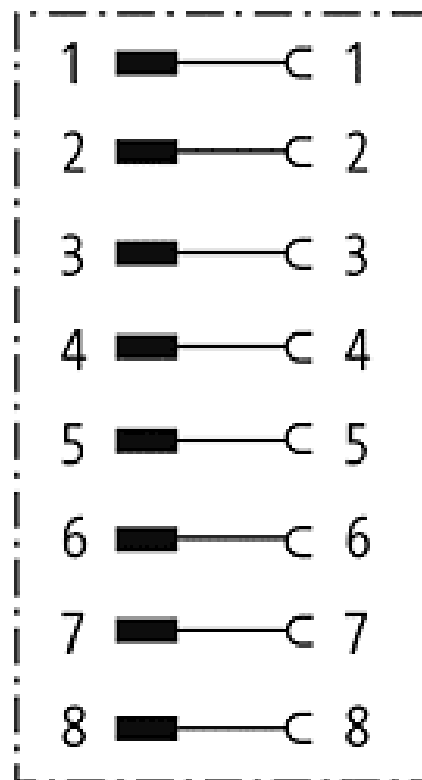

Dimension drawing

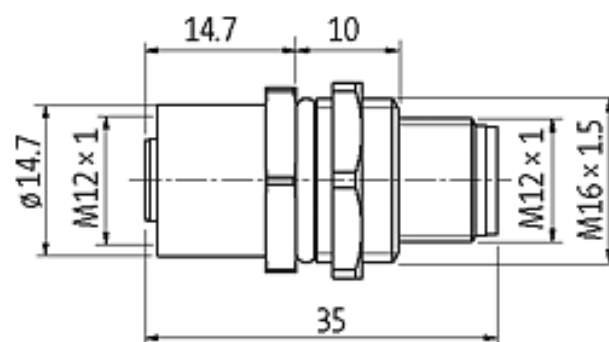

Representante oficial de:



[Argentina – Uruguay – Paraguay – Bolivia – Colombia – y Perú.]



Calle 49 N° 5764 - Villa Ballester (B1653AOX) - Prov. de Buenos Aires - ARGENTINA
Tel: (+54 11) 4768-4242 / Fax: (+54 11) 4849-1212
Mail: ventas@nakase.com.ar / Web: www.nakase.com.ar

