

Passive-distr. plastic, 4xM12, 5pol, pre-wired cable 10.0m PUR-IB 8x0,34+3x0,75

4-way, 5-pole
PUR/PVC
10.0 m
with LED for digital PNP-signals 24 V DC

Image



Vicarious picture

Approvals



Contact layout

| | |
|-----------|------------|
| Contact 1 | (+) |
| Contact 2 | (N/C)/(S2) |
| Contact 3 | (-) |
| Contact 4 | (N/O)/(S1) |
| Contact 5 | (Earth) |

Technical Data

| | |
|---------------------------------------|--|
| Operating voltage | 24 V DC |
| Operating voltage indicator | LED (green) |
| Signal per port | 2 |
| LED display per port | LED (yellow) per signal (PNP) |
| Operating current per contact (40 °C) | max. 4 A |
| Total current | max. 8 A |
| Housing | Plastic, flame retardant |
| Protection | IP65 and IP67 when plugged and screwed down (EN 60529) |
| Temperature range | -20...+80 °C |

Technical data M12 port

| | |
|------------------|-------------------------|
| Locking of ports | Screw thread M12 × 1 mm |
|------------------|-------------------------|


All data on this data sheet was compiled carefully.

Liability regarding correctness, completeness, and actuality is limited to gross negligence. Created: 06/12


| Cable | | |
|------------------------|-------------------------------------|-----------------------|
| No./diameter of wires | 8 × 0.34 + 3 × 0.75 mm ² | |
| C-track properties | 2 Mio. | |
| Jacket | PUR/PVC | |
| Outer diameter | approx. 8.1 mm | |
| Bend radius (mobile) | 12 × outer diameter | |
| Cable number | 363 | |
| Commercial data | | |
| Net weight | 1387 | |
| Net weight | 1387 | |
| Weight unit | gram | |
| Basic unit | pc. | |
| Customs tariff number | 85444290 | |
| Unit (piece) | 1 | |
| Limited value | 1 | |
| Accessories | | |
| | M12 plastic lock screw | Art.-No. 58627 |
| | DIN-rail adapter | 27905 |
| Comments | | |
| | Further cable lengths on request. | |

Contact layout

M12 Females 5-pole

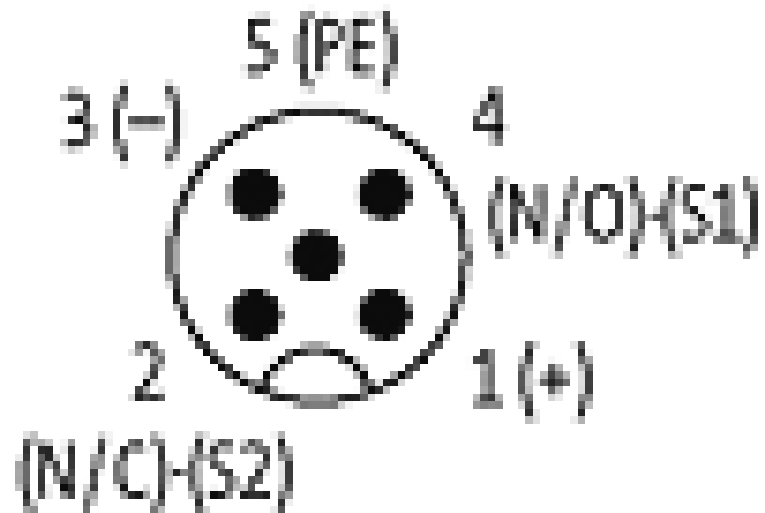

Dimension drawing

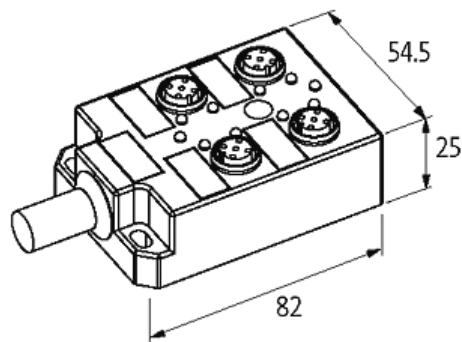

Representante oficial de:



[Argentina – Uruguay – Paraguay – Bolivia – Colombia – y Perú.]



Calle 49 N° 5764 - Villa Ballester (B1653AOX) - Prov. de Buenos Aires - ARGENTINA
Tel: (+54 11) 4768-4242 / Fax: (+54 11) 4849-1212
Mail: ventas@nakase.com.ar / Web: www.nakase.com.ar

