

Exact12, 8xM12, 5-pole, basic housing, no LED without homerun-cable

8-way, 5-pole  
without LED, up to 125 V AC/DC  
Screw plug-in terminals

### Image



Vicarious picture

### Approvals



#### Contact layout

Contact 1	(+)
Contact 2	(N/C)/(S2)
Contact 3	(-)
Contact 4	(N/O)/(S1)
Contact 5	(Earth)

#### Technical Data

Operating voltage	125 V AC/DC
Operating current per contact (40 °C)	max. 4 A
Total current	max. 8 A
Housing	Plastic, flame retardant
Protection	IP65 and IP67 when plugged and screwed down (EN 60529)
Temperature range	-20...+60 °C

#### Technical data M12 port

Locking of ports	Screw thread M12 × 1 mm
------------------	-------------------------

#### Commercial data



Net weight	127
Net weight	127
Weight unit	gram
Basic unit	pc.
Customs tariff number	85369010
Unit (piece)	1
Limited value	1

#### Comments


Plastic housings with good resistance against chemicals and oils.  
The resistance to aggressive media should be individually tested for your application. Further details on request.

All data on this data sheet was compiled carefully.  
Liability regarding correctness, completeness, and actuality is limited to gross negligence. Created: 06/12


Contact layout

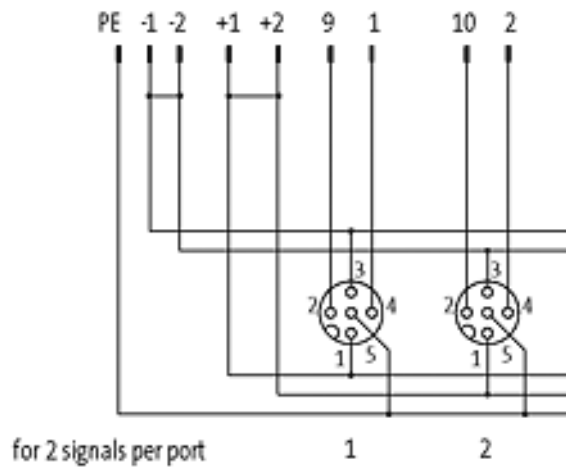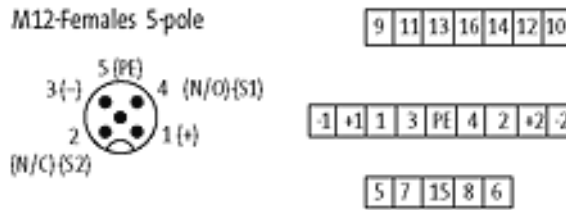


Circuit diagram

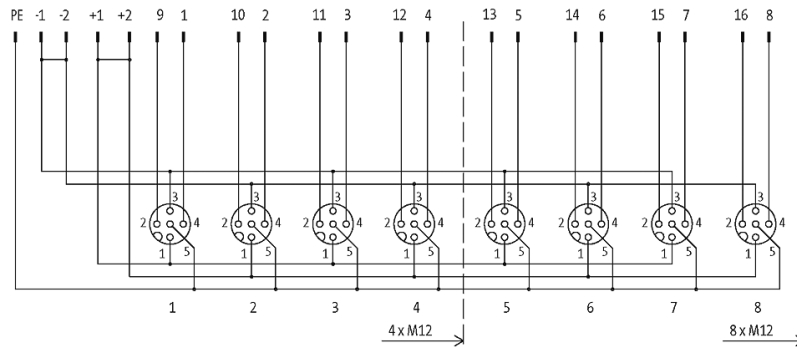

Dimension drawing

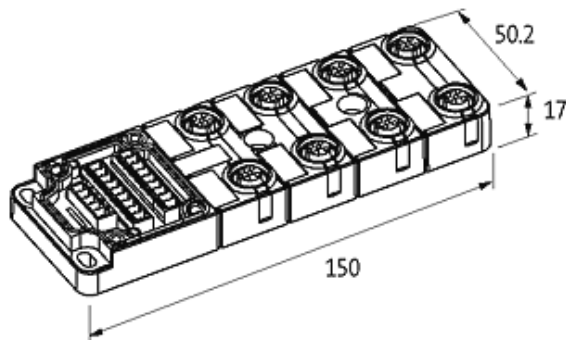

De-rating curve

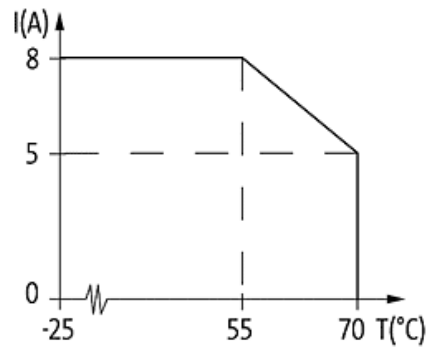

Representante oficial de:



[Argentina – Uruguay – Paraguay – Bolivia – Colombia – y Perú.]



Calle 49 N° 5764 - Villa Ballester (B1653AOX) - Prov. de Buenos Aires - ARGENTINA  
Tel: (+54 11) 4768-4242 / Fax: (+54 11) 4849-1212  
Mail: [ventas@nakase.com.ar](mailto:ventas@nakase.com.ar) / Web: [www.nakase.com.ar](http://www.nakase.com.ar)

