

Connection cap with homerun cable

for 8-way distribution box, 4-pole

Image

Vicarious picture

Approvals**Form**

88459

Technical Data

Housing	Plastic, flame retardant
Temperature range	-20...+80 °C, depending on cable quality

You can chose from the following variants:

	Art.-No.
Cap with cable for d-box M12 8-way 4-pole no pot.-sep. 3m PUR/PVC-JB, 8x0,34+3x0,75	8000-88459-3620300
Cap with cable for d-box M12 8-way 4-pole no pot.-sep. 5m PUR/PVC-JB, 8x0,34+3x0,75	8000-88459-3620500
Cap with cable for d-box M12 8-way 4-pole no pot.-sep. 10m PUR/PVC-JB, 8x0,34+3x0,75	8000-88459-3621000
Cap with cable for d-box M12 8-way 4-pole no pot.-sep. 15m PUR/PVC-JB, 8x0,34+3x0,75	8000-88459-3621500
Cap with cable for d-box M12 8-way 4-pole no pot.-sep. 20m PUR/PVC-JB, 8x0,34+3x0,75	8000-88459-3622000
Cap with cable for d-box M12 8-way 4-pole no pot.-sep. 25m PUR/PVC-JB, 8x0,34+3x0,75	8000-88459-3622500
Cap with cable for d-box M12 8-way 4-pole no pot.-sep. 30m PUR/PVC-JB, 8x0,34+3x0,75	8000-88459-3623000
Cap with cable for d-box M12 8-way 4-pole no pot.-sep. 3m PUR, 8x0,5+3x1,0	8000-88459-4470300
Cap with cable for d-box M12 8-way 4-pole no pot.-sep. 5m PUR, 8x0,5+3x1,0	8000-88459-4470500
Cap with cable for d-box M12 8-way 4-pole no pot.-sep. 10m PUR, 8x0,5+3x1,0	8000-88459-4471000
Cap with cable for d-box M12 8-way 4-pole no pot.-sep. 15m PUR, 8x0,5+3x1,0	8000-88459-4471500
Cap with cable for d-box M12 8-way 4-pole no pot.-sep. 20m PUR, 8x0,5+3x1,0	8000-88459-4472000
Cap with cable for d-box M12 8-way 4-pole no pot.-sep. 25m PUR, 8x0,5+3x1,0	8000-88459-4472500
Cap with cable for d-box M12 8-way 4-pole no pot.-sep. 30m PUR, 8x0,5+3x1,0	8000-88459-4473000

Comments



Further cable lengths on request.
 Plastic housings with good resistance against chemicals and oils.
 The resistance to aggressive media should be individually tested for your application. Further details on request.

All data on this data sheet was compiled carefully.

Liability regarding correctness, completeness, and actuality is limited to gross negligence. Created: 06/12


Contact layout

M12 Females 4-pole

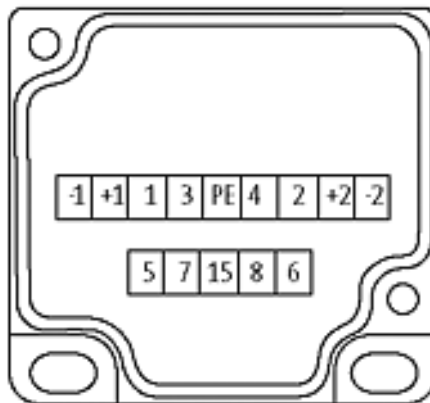

for 1 signal per port

Dimension drawing

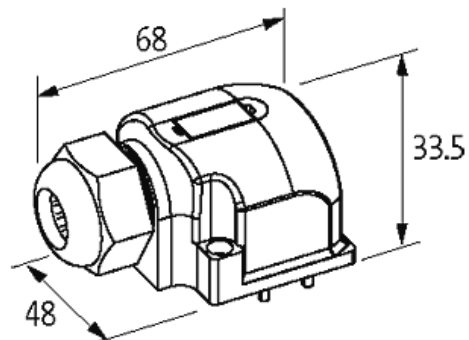

Representante oficial de:



[Argentina – Uruguay – Paraguay – Bolivia – Colombia – y Perú.]



Calle 49 N° 5764 - Villa Ballester (B1653AOX) - Prov. de Buenos Aires - ARGENTINA
Tel: (+54 11) 4768-4242 / Fax: (+54 11) 4849-1212
Mail: ventas@nakase.com.ar / Web: www.nakase.com.ar

