

Exact12, 8-way, 5-pole, with pre-wired homerun cable

5-pole

Image



Vicarious picture

Approvals



Contact layout

Contact 1	(+)
Contact 2	(N/C)/(S2)
Contact 3	(-)
Contact 4	(N/O)/(S1)
Contact 5	(Earth)
LED display	LED (green): Power LED (yellow): signal (S1) LED (white): Signal (S2)

Form

88510

Technical Data

Protection	IP65 and IP67 when plugged and screwed down (EN 60529)
Operating voltage	24 V DC
Operating current per contact (40 °C)	max. 4 A
Total current	max. 10 A
Housing	Plastic, flame retardant
Temperature range	-20...+60 °C

Technical data M12 port

Locking of ports	Screw thread M12 × 1 mm
------------------	-------------------------

All data on this data sheet was compiled carefully.

Liability regarding correctness, completeness, and actuality is limited to gross negligence. Created: 06/12

You can chose from the following variants:	Art.-No.
Exact12, 8xM12, 5-pole, moulded cable 3.0m PUR/PVC 16x0,34+3x0,75, UL/CSA	8000-88510-3980300
Exact12, 8xM12, 5-pole, moulded cable 5.0m PUR/PVC 16x0,34+3x0,75, UL/CSA	8000-88510-3980500
Exact12, 8xM12, 5-pole, moulded cable 10.0m PUR/PVC 16x0,34+3x0,75, UL/CSA	8000-88510-3981000
Exact12, 8xM12, 5-pole, moulded cable 15.0m PUR/PVC 16x0,34+3x0,75, UL/CSA	8000-88510-3981500
Exact12, 8xM12, 5-pole, moulded cable 3.0m PUR 16x0,5+3x1,0, UL/CSA	8000-88510-4520300
Exact12, 8xM12, 5-pole, moulded cable 5.0m PUR 16x0,5+3x1,0, UL/CSA	8000-88510-4520500
Exact12, 8xM12, 5-pole, moulded cable 10.0m PUR 16x0,5+3x1,0, UL/CSA	8000-88510-4521000
Exact12, 8xM12, 5-pole, moulded cable 15.0m PUR 16x0,5+3x1,0, UL/CSA	8000-88510-4521500


Comments

Further cable lengths on request.


Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.


Contact layout

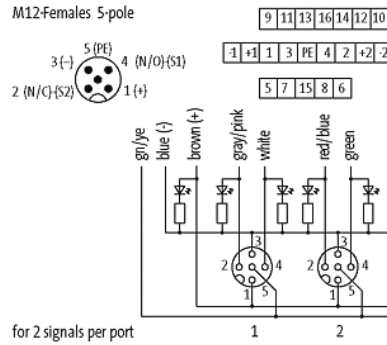

Circuit diagram

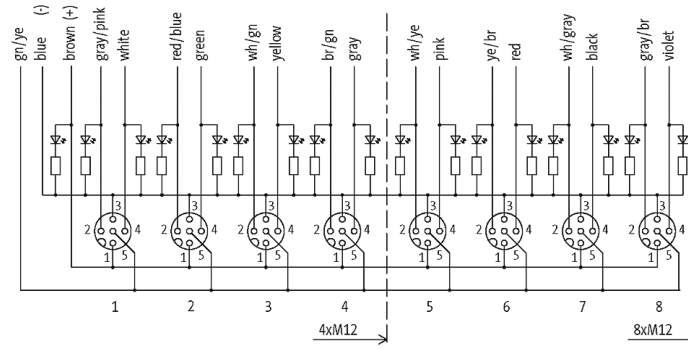

Dimension drawing

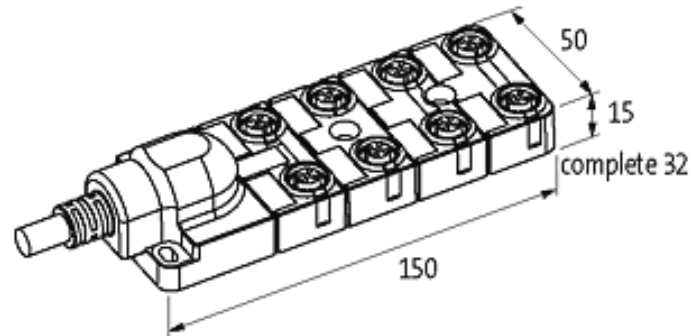

Representante oficial de:



[Argentina – Uruguay – Paraguay – Bolivia – Colombia – y Perú.]



Calle 49 N° 5764 - Villa Ballester (B1653AOX) - Prov. de Buenos Aires - ARGENTINA
Tel: (+54 11) 4768-4242 / Fax: (+54 11) 4849-1212
Mail: ventas@nakase.com.ar / Web: www.nakase.com.ar

