

**Exact8, 8-way with pre-wired homerun cable**

8-way, 4-pole

**Image**

Vicarious picture

**Approvals****Contact layout**

Contact 1	(+)
Contact 2	(N/C)/(S2)
Contact 3	(-)
Contact 4	(N/O)/(S1)
LED display	LED (green): Power    LED (yellow): signal (S1)    LED (white): Signal (S2)

**Form**

88110

**Technical Data**

Operating voltage	24 V DC
Operating current per contact (40 °C)	max. 1,76A
Signal per port	2
Total current	max. 10 A
Protection	IP65 and IP67 when plugged and screwed down (EN 60529)
Housing	Plastic, flame retardant
Temperature range	-20...+80 °C, depending on cable quality

All data on this data sheet was compiled carefully.

Liability regarding correctness, completeness, and actuality is limited to gross negligence. Created: 06/12

You can chose from the following variants:	Art.-No.
Exact8, 8xM8, 4-pole, moulded cable 3.0m PUR/PVC 16x0,34+2x0,75	8000-88110-3950300
Exact8, 8xM8, 4-pole, moulded cable 5.0m PUR/PVC 16x0,34+2x0,75	8000-88110-3950500
Exact8, 8xM8, 4-pole, moulded cable 10.0m PUR/PVC 16x0,34+2x0,75	8000-88110-3951000
Exact8, 8xM8, 4-pole, moulded cable 15.0m PUR/PVC 16x0,34+2x0,75	8000-88110-3951500
Exact8, 8xM8, 4-pole, moulded cable 3.0m PUR 16x0,34+2x0,75, UL/CSA	8000-88110-3960300
Exact8, 8xM8, 4-pole, moulded cable 5.0m PUR 16x0,34+2x0,75, UL/CSA	8000-88110-3960500
Exact8, 8xM8, 4-pole, moulded cable 10.0m PUR 16x0,34+2x0,75, UL/CSA	8000-88110-3961000
Exact8, 8xM8, 4-pole, moulded cable 15.0m PUR 16x0,34+2x0,75, UL/CSA	8000-88110-3961500

**Comments**



Further cable lengths on request.

Plastic housings with good resistance against chemicals and oils.


The resistance to aggressive media should be individually tested for your application. Further details on request.

Contact layout


M8-Females 4-pole

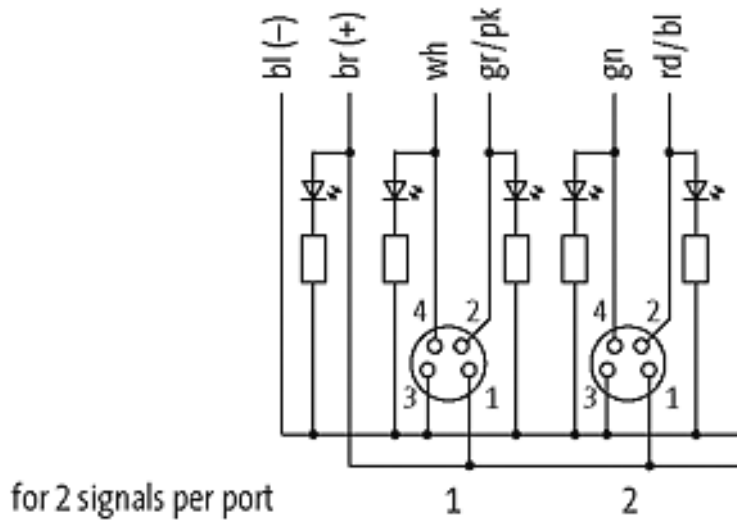

Circuit diagram

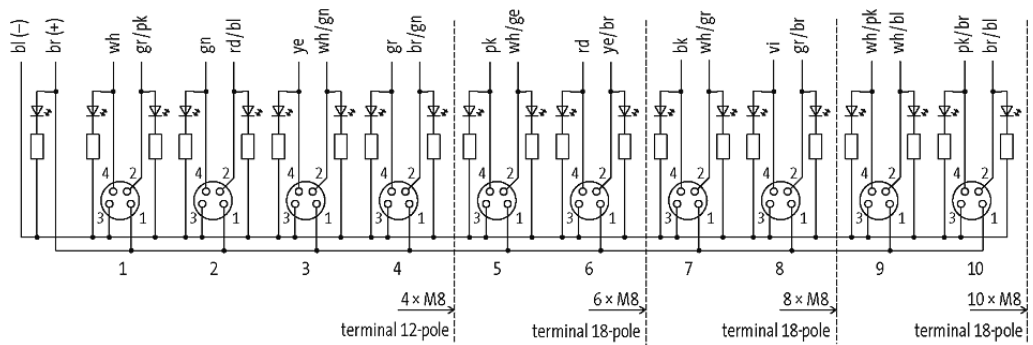

Dimension drawing

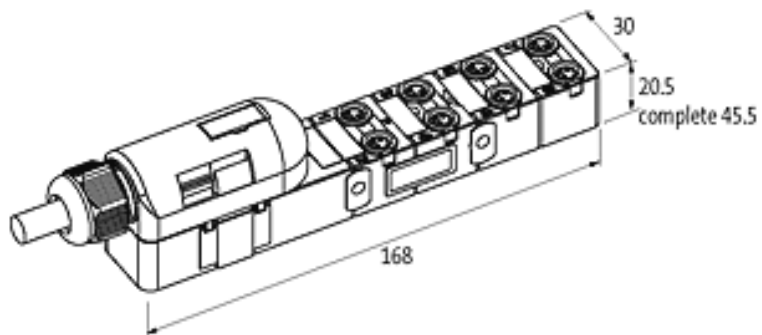

Representante oficial de:



[Argentina – Uruguay – Paraguay – Bolivia – Colombia – y Perú.]



Calle 49 N° 5764 - Villa Ballester (B1653AOX) - Prov. de Buenos Aires - ARGENTINA  
Tel: (+54 11) 4768-4242 / Fax: (+54 11) 4849-1212  
Mail: [ventas@nakase.com.ar](mailto:ventas@nakase.com.ar) / Web: [www.nakase.com.ar](http://www.nakase.com.ar)

