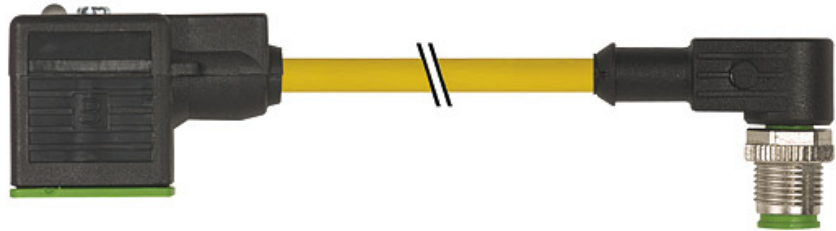


**M12 male 90° / MSUD valve form A 18mm PVC-JB 5x0,34 yellow 0,3m**

Form A (18 mm) ? M12, male 90°  
for pressure switches  
LED (red/green)  
5-pole

**Image**

Vicarious picture

**Approvals****Form****Technical Data**

|                                       |  |
|---------------------------------------|--|
| Operating voltage                     | 24 V AC/DC                               |
| Operating current per contact (40 °C) | max. 4 A                                 |
| Current consumption                   | approx. 12 mA                            |
| Housing                               | Plastic, black (gray on request)         |
| Temperature range                     | -25...+85 °C, depending on cable quality |

**Cable**

|                            |   |
|----------------------------|---|
| No./diameter of wires      | 5 x 0.34 mm <sup>2</sup>                                      |
| Wire isolation             | PVC (br, wh, bl, bk, gnye)                                    |
| C-track properties         | Max. Externe Vorsicherung 20 A (T) in der Gebäudeinstallation |
| Jacket                     | PVC   |
| Outer diameter             | approx. 5.2 mm  |
| Bend radius (mobile)       | 10 x outer diameter   |
| Temperature range (fixed)  | -30...+80 °C  |
| Temperature range (mobile) | -5...+80 °C   |

All data on this data sheet was compiled carefully.

Liability regarding correctness, completeness, and actuality is limited to gross negligence. Created: 06/12


**Commercial data**

|                       |          |
|-----------------------|----------|
| Net weight            | 66       |
| Net weight            | 66       |
| Weight unit           | gram     |
| Basic unit            | pc.      |
| Customs tariff number | 85444290 |
| Unit (piece)          | 1        |
| Limited value         | 1        |


**Comments**

Further cable lengths on request.  
Plastic housings with good resistance against chemicals and oils.  
The resistance to aggressive media should be individually tested for your application. Further details on request.

## Contact layout

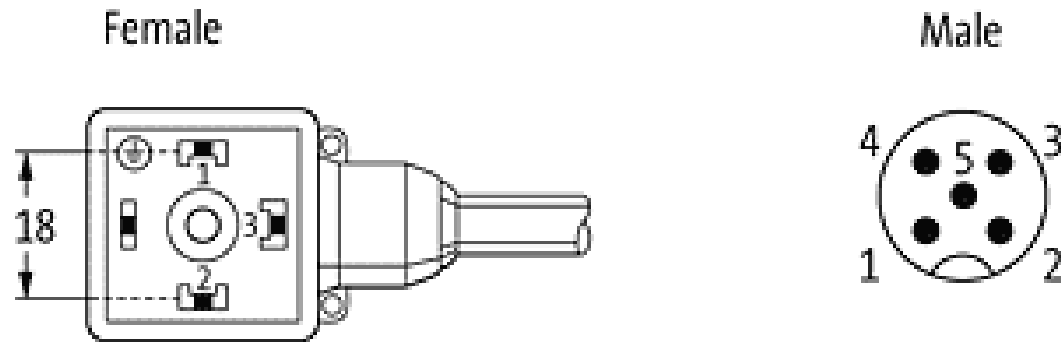

## Circuit diagram

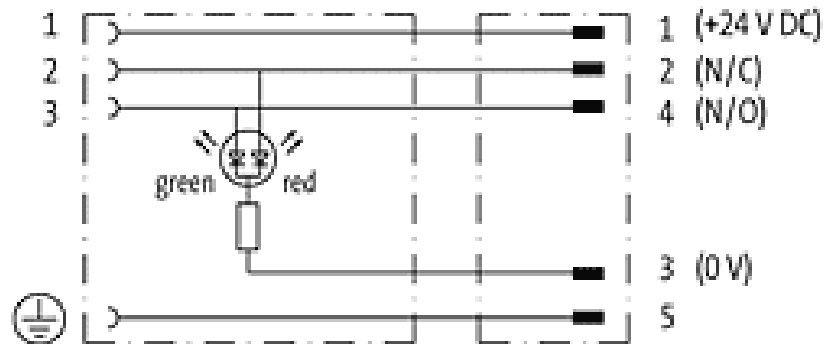

Representante oficial de:



[Argentina – Uruguay – Paraguay – Bolivia – Colombia – y Perú.]



Calle 49 N° 5764 - Villa Ballester (B1653AOX) - Prov. de Buenos Aires - ARGENTINA  
Tel: (+54 11) 4768-4242 / Fax: (+54 11) 4849-1212  
Mail: [ventas@nakase.com.ar](mailto:ventas@nakase.com.ar) / Web: [www.nakase.com.ar](http://www.nakase.com.ar)

