

M12 male straight / MSUD valve form CI 9,4mm PVC-JZ 3x0,75 yellow 0,3m

Form CI (9.4 mm) ? M12, male straight
LED and suppression
3-pole

Image

Vicarious picture

Approvals**Form**

41041

Technical Data

| | |
|---------------------------------------|--|
| Operating voltage | 24 V AC $\pm 20\%$ / DC $\pm 25\%$ |
| Operating current per contact (40 °C) | max. 4 A |
| Switch off spike | ≤ 55 V |
| Switch off delay time | ≤ 20 ms |
| Housing | Plastic, black (gray on request) |
| Protection | IP65 and IP67 when plugged and screwed down (EN 60529) |
| Temperature range | -25...+85 °C, depending on cable quality |

Cable

| | |
|----------------------------|---|
| No. / diameter of wires | 3 \times 0.75 mm ² |
| Wire isolation | PVC (bk, num, gnye) |
| C-track properties | Max. Externe Vorsicherung 20 A (T) in der Gebäudeinstallation |
| Jacket | PVC |
| Outer diameter | approx. 5.9 mm |
| Bend radius (mobile) | 10 x outer diameter |
| Temperature range (fixed) | -30...+70 °C |
| Temperature range (mobile) | -5...+70 °C |

All data on this data sheet was compiled carefully.

Liability regarding correctness, completeness, and actuality is limited to gross negligence. Created: 06/12

Commercial data


| | |
|-----------------------|----------|
| Net weight | 44 |
| Net weight | 44 |
| Weight unit | gram |
| Basic unit | pc. |
| Customs tariff number | 85444290 |
| Unit (piece) | 1 |
| Limited value | 1 |

Comments


Further cable lengths on request.
Plastic housings with good resistance against chemicals and oils.
The resistance to aggressive media should be individually tested for your application. Further details on request.

Contact layout

Female

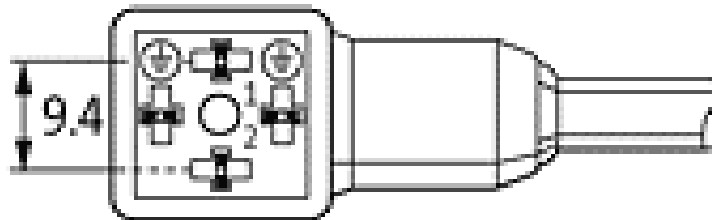

Circuit diagram

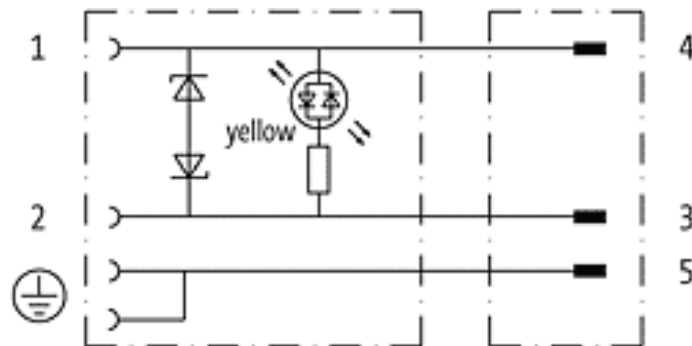

Representante oficial de:



[Argentina – Uruguay – Paraguay – Bolivia – Colombia – y Perú.]



Calle 49 N° 5764 - Villa Ballester (B1653AOX) - Prov. de Buenos Aires - ARGENTINA
Tel: (+54 11) 4768-4242 / Fax: (+54 11) 4849-1212
Mail: ventas@nakase.com.ar / Web: www.nakase.com.ar

