


M12 male 90° / MSUD valve form CI 9,4mm PVC-JZ 3x0,75 yellow 0,3m

Form CI (9.4 mm) ? M12, male 90°

LED and suppression

3-pole

Image

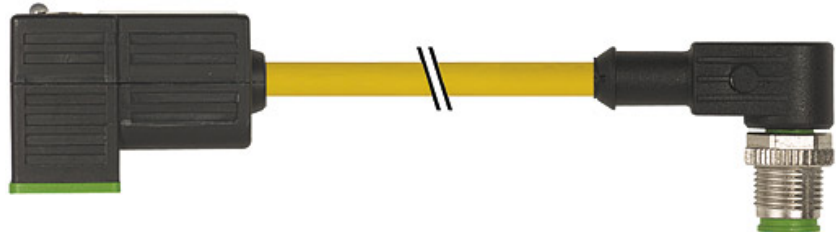

Vicarious picture

Approvals



Form

41061

Technical Data

Operating voltage	24 V AC/DC
Operating current per contact (40 °C)	max. 4 A
Switch off spike	<= 55 V
Switch off delay time	<= 20 ms
LED display	(yellow)
Current consumption	approx. 12 mA
Housing	Plastic, black (gray on request)
Temperature range	-25...+85 °C, depending on cable quality

Cable

No./diameter of wires	3 x 0.75 mm ²
Wire isolation	PVC (bk, num, gnye)
C-track properties	Max. Externe Vorsicherung 20 A (T) in der Gebäudeinstallation
Jacket	PVC
Outer diameter	approx. 5.9 mm
Bend radius (mobile)	10 x outer diameter
Temperature range (fixed)	-30...+70 °C
Temperature range (mobile)	-5...+70 °C

All data on this data sheet was compiled carefully.

Liability regarding correctness, completeness, and actuality is limited to gross negligence. Created: 06/12

Commercial data


Net weight	47
Net weight	47
Weight unit	gram
Basic unit	pc.
Customs tariff number	85444290
Unit (piece)	1
Limited value	1

Comments


Further cable lengths on request.
Plastic housings with good resistance against chemicals and oils.
The resistance to aggressive media should be individually tested for your application. Further details on request.

Contact layout

Female

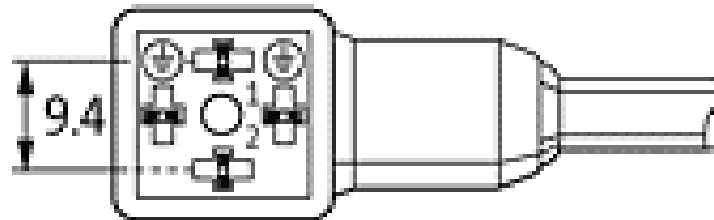

Circuit diagram

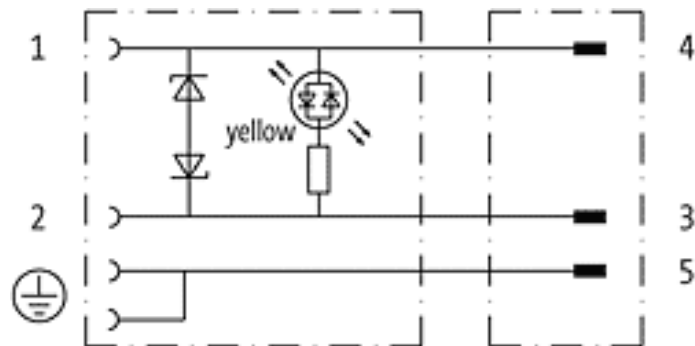

Representante oficial de:



[Argentina – Uruguay – Paraguay – Bolivia – Colombia – y Perú.]



Calle 49 N° 5764 - Villa Ballester (B1653AOX) - Prov. de Buenos Aires - ARGENTINA
Tel: (+54 11) 4768-4242 / Fax: (+54 11) 4849-1212
Mail: ventas@nakase.com.ar / Web: www.nakase.com.ar

