

M8 male connector straight with cable PVC-OB 3x0,25 yellow 5m

Male straight
3-pole

Image



Vicarious picture

Approvals



Express shipments

Form

08001

Technical Data

| | |
|---------------------------------------|--|
| Operating voltage | max. 60 V AC/DC |
| Operating current per contact (40 °C) | max. 4 A |
| Locking of ports | Screw thread M8 × 1 mm (recommended torque = 0.4 Nm) self-securing |
| Protection | IP65 and IP67 when plugged and screwed down (EN 60529) |
| Temperature range | -25...+85 °C, depending on cable quality |

All data on this data sheet was compiled carefully.

Liability regarding correctness, completeness, and actuality is limited to gross negligence. Created: 06/12

Cable

| | |
|----------------------------|---|
| No./diameter of wires | 3 × 0.25 mm ² |
| Wire isolation | PVC (br, bl, bk) |
| C-track properties | Max. Externe Vorsicherung 20 A (T) in der Gebäudeinstallation |
| Jacket | PVC |
| Outer diameter | approx. 4.5 mm |
| Bend radius (mobile) | 10 x outer diameter |
| Temperature range (fixed) | -30...+80 °C |
| Temperature range (mobile) | -5...+80 °C |

Commercial data


| | |
|-----------------------|----------|
| Net weight | 142 |
| Net weight | 142 |
| Weight unit | gram |
| Basic unit | pc. |
| Customs tariff number | 85444290 |
| Unit (piece) | 1 |
| Limited value | 1 |

Comments


Plastic housings with good resistance against chemicals and oils.
The resistance to aggressive media should be individually tested for your application. Further details on request.

Contact layout

Male

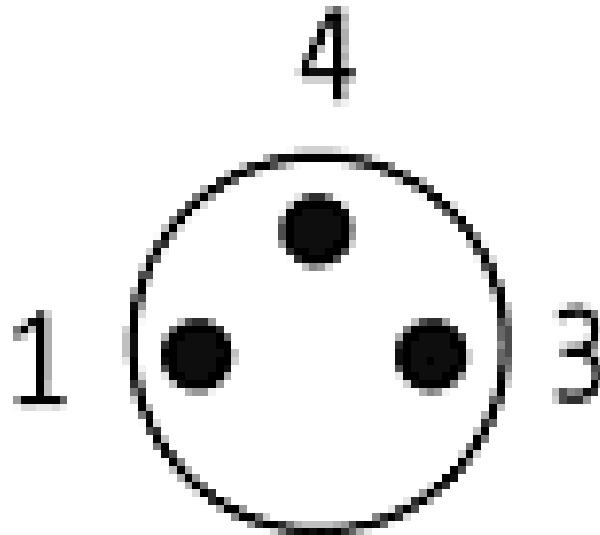

Dimension drawing

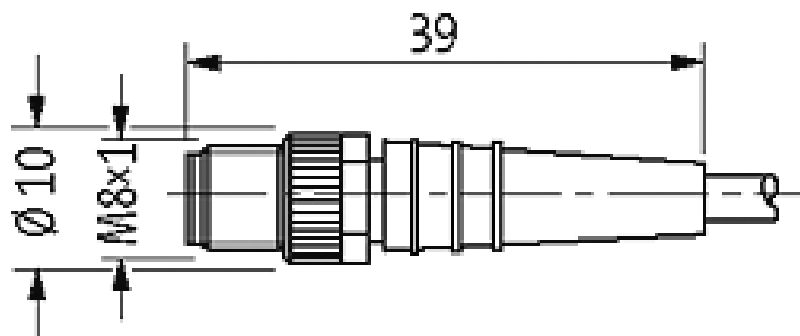

Representante oficial de:



[Argentina – Uruguay – Paraguay – Bolivia – Colombia – y Perú.]



Calle 49 N° 5764 - Villa Ballester (B1653AOX) - Prov. de Buenos Aires - ARGENTINA
Tel: (+54 11) 4768-4242 / Fax: (+54 11) 4849-1212
Mail: ventas@nakase.com.ar / Web: www.nakase.com.ar

