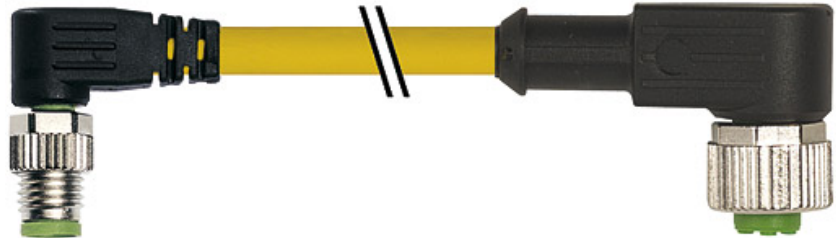


**M8 male 90° / M12 female 90° PVC-OB 3x0,25 yellow 0,3m**

 Male 90° to female 90°  
 M8 - M12, 3-pole

**Image**


Vicarious picture

**Approvals**

**Form**

88321

**Technical Data**

|                                       |  |
|---------------------------------------|--|
| Protection                            | IP65 and IP67 when plugged and screwed down (EN 60529)             |
| Operating voltage                     | 60 V AC/DC   |
| Operating current per contact (40 °C) | max. 4 A   |
| Locking of ports                      | Screw thread M8 × 1 mm (recommended torque = 0.6 Nm) self-securing |
| Temperature range                     | -25...+85 °C, depending on cable quality                           |

**Cable**

|                            |   |
|----------------------------|---|
| No./diameter of wires      | 3 × 0.25 mm <sup>2</sup>                                      |
| Wire isolation             | PVC (br, bl, bk)  |
| C-track properties         | Max. Externe Vorsicherung 20 A (T) in der Gebäudeinstallation |
| Jacket                     | PVC   |
| Outer diameter             | approx. 4.5 mm  |
| Bend radius (mobile)       | 10 x outer diameter   |
| Temperature range (fixed)  | -30...+80 °C  |
| Temperature range (mobile) | -5...+80 °C   |

All data on this data sheet was compiled carefully.

Liability regarding correctness, completeness, and actuality is limited to gross negligence. Created: 06/12

**Commercial data**

|                       |          |
|-----------------------|----------|
| Net weight            | 27       |
| Net weight            | 27       |
| Weight unit           | gram     |
| Basic unit            | pc.      |
| Customs tariff number | 85444290 |
| Unit (piece)          | 1        |
| Limited value         | 1        |

**Comments**

Further cable lengths on request.  
Plastic housings with good resistance against chemicals and oils.  
The resistance to aggressive media should be individually tested for your application. Further details on request.