

M12 male straight shielded field-wireable b-cod. (for PROFIBUS take 7000-14005)

Male M12, straight
field-wireable, screw terminals
B-coded, 5-pole, shielded

Image

Vicarious picture

Technical Data


| | |
|---------------------------------------|--|
| Operating voltage | max. 125 V AC/DC |
| Operating current per contact (40 °C) | max. 4 A |
| Connection diameter | max. 0.75 mm ² |
| Clamping range (cable diameter) | 6...8 mm |
| Housing | CuZn, nickel plated |
| Protection | IP65 and IP67 when plugged and screwed down (EN 60529) |
| Temperature range | -25...+85 °C |

Commercial data

| | |
|-----------------------|----------|
| Net weight | 42 |
| Net weight | 42 |
| Weight unit | gram |
| Basic unit | pc. |
| Customs tariff number | 85369010 |
| Unit (piece) | 1 |
| Limited value | 1 |

Contact layout

Male

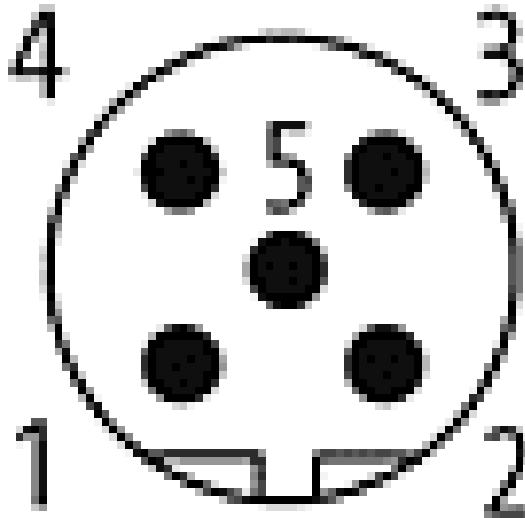

Representante oficial de:



[Argentina – Uruguay – Paraguay – Bolivia – Colombia – y Perú.]



Calle 49 N° 5764 - Villa Ballester (B1653AOX) - Prov. de Buenos Aires - ARGENTINA
Tel: (+54 11) 4768-4242 / Fax: (+54 11) 4849-1212
Mail: ventas@nakase.com.ar / Web: www.nakase.com.ar

