

**SVS valve form A 18mm field-wireable Replaced Art.-No. 29890**

Form A (18 mm)  
0...230 V AC/DC, without components  
metric

**Image**

Vicarious picture

**Approvals****Form**

29241

**Technical Data**

|                                       |   |
|---------------------------------------|---|
| Operating voltage                     | 0...230 V AC/DC   |
| Operating current per contact (40 °C) | max. 10 A   |
| Clamping range (cable diameter)       | 5...10 mm   |
| Compression gland                     | M16 × 1.5 mm  |
| Terminals                             | 4 mm <sup>2</sup> single core, with ferrule end 1.5 mm <sup>2</sup> |
| Protection                            | IP65 when plugged and screwed down (EN 60529), with gland           |
| Temperature range                     | -20...+60 °C  |

**Commercial data**

|                       |          |
|-----------------------|----------|
| Net weight            | 40       |
| Net weight            | 40       |
| Weight unit           | gram     |
| Basic unit            | pc.      |
| Customs tariff number | 85366990 |
| Unit (piece)          | 1        |
| Limited value         | 1        |


**Comments**

Plastic housings with good resistance against chemicals and oils.  
The resistance to aggressive media should be individually tested for your application. Further details on request.


All data on this data sheet was compiled carefully.

Liability regarding correctness, completeness, and actuality is limited to gross negligence. Created: 06/12


## Contact layout

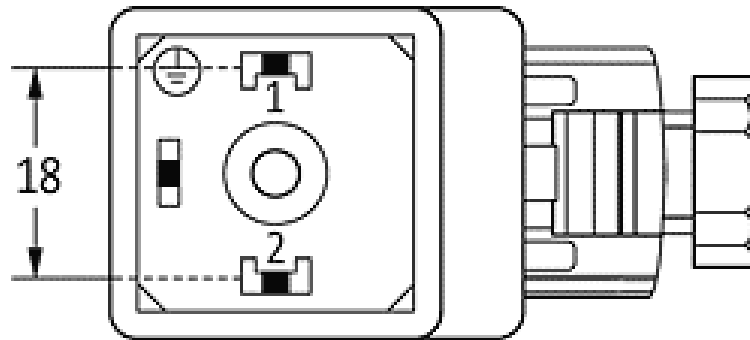

## Circuit diagram

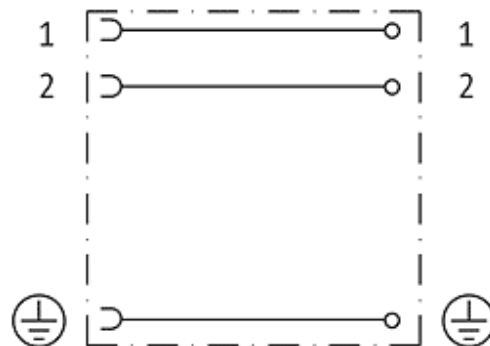

## Dimension drawing

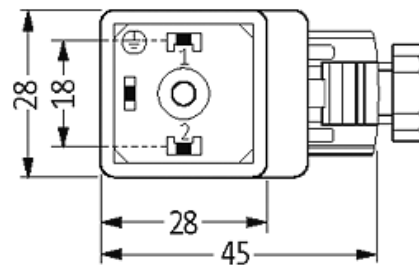

Height: 41 mm

Representante oficial de:



[Argentina – Uruguay – Paraguay – Bolivia – Colombia – y Perú.]



Calle 49 N° 5764 - Villa Ballester (B1653AOX) - Prov. de Buenos Aires - ARGENTINA  
Tel: (+54 11) 4768-4242 / Fax: (+54 11) 4849-1212  
Mail: [ventas@nakase.com.ar](mailto:ventas@nakase.com.ar) / Web: [www.nakase.com.ar](http://www.nakase.com.ar)

