

## SVS valve form A 18mm field-wireable Replaced Art.-No. 29090

Form A (18 mm)  
 0...230 V AC/DC, without components  
 PG 9

## Image



Vicarious picture

## Approvals



## Form

29261

## Technical Data

Operating voltage	0...230 V AC/DC
Operating current per contact (40 °C)	max. 10 A
Clamping range (cable diameter)	6...8 mm
Compression gland	PG 9; (PG11 and NPT 1/2" on request)
Terminals	4 mm <sup>2</sup> single core, with ferrule end 1.5 mm <sup>2</sup>
Protection	IP65 when plugged and screwed down (EN 60529), with gland
Temperature range	-20...+60 °C


## Commercial data

Net weight	28
Net weight	28
Weight unit	gram
Basic unit	pc.
Customs tariff number	85366990
Unit (piece)	1
Limited value	1


## Comments

Plastic housings with good resistance against chemicals and oils.  
 The resistance to aggressive media should be individually tested for your application. Further details on request.


## Contact layout

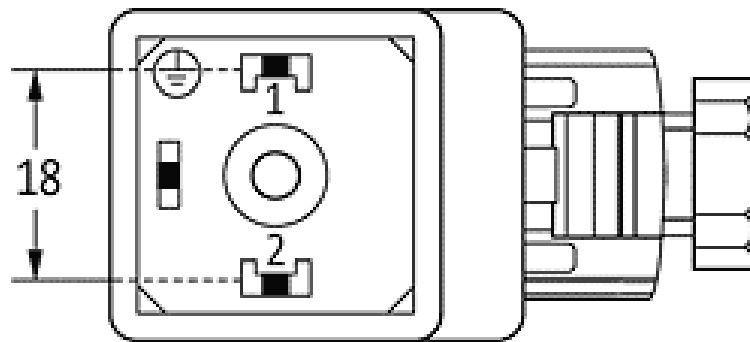

## Circuit diagram

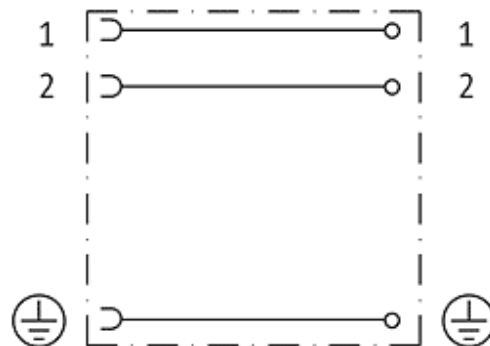

## Dimension drawing

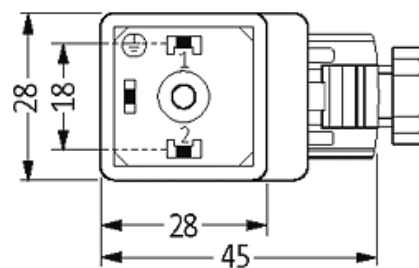

Height: 41 mm

Representante oficial de:



[Argentina – Uruguay – Paraguay – Bolivia – Colombia – y Perú.]



Calle 49 N° 5764 - Villa Ballester (B1653AOX) - Prov. de Buenos Aires - ARGENTINA  
Tel: (+54 11) 4768-4242 / Fax: (+54 11) 4849-1212  
Mail: [ventas@nakase.com.ar](mailto:ventas@nakase.com.ar) / Web: [www.nakase.com.ar](http://www.nakase.com.ar)

