

SVS Eco LED valve form A 18mm LED+VDR 110V 2+PE field-wireable M16x1,5

Form A (18 mm)
110 V AC/DC with LED and VDR
metric

Image

Vicarious picture

Approvals**Form**

29085

Technical Data

Operating voltage	110 V AC/DC $\pm 10\%$
Operating current per contact (40 °C)	max. 1.5 A
Connection diameter	0.5...1.5 mm ²
Clamping range (cable diameter)	6...8 mm
Contact figure	Cable outlet can be turned in 90° steps
Compression gland	M16 × 1.5 mm
Protection	IP65 when plugged and screwed down (EN 60529)
Temperature range	-40...+60 °C


Commercial data

Net weight	28
Net weight	28
Weight unit	gram
Basic unit	pc.
Customs tariff number	85366990
Unit (piece)	1
Limited value	1


Comments

Plastic housings with good resistance against chemicals and oils.
The resistance to aggressive media should be individually tested for your application. Further details on request.


Contact layout

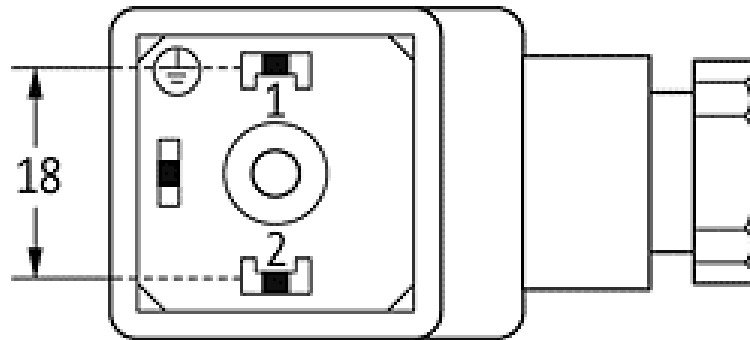

Circuit diagram

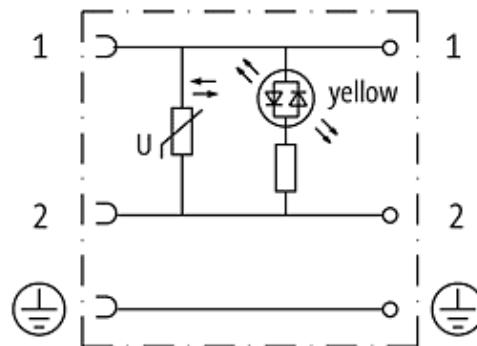

Dimension drawing

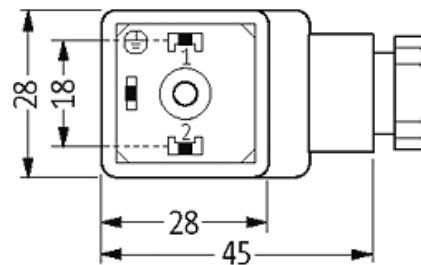

Height: 31 mm