

SVS Eco LED valve form B 11mm LED+VDR 24V 2+PE field-wireable M16x1,5

Form B1 (11 mm)
24 V AC/DC with LED and VDR
metric

Image



Vicarious picture

Approvals



Form

29805

Technical Data

Operating voltage	24 V AC/DC $\pm 10\%$
Operating current per contact (40 °C)	max. 1.5 A
Connection diameter	0.5...1.5 mm ²
Clamping range (cable diameter)	6...8 mm
Contact figure	Cable outlet can be turned in 180° steps
Compression gland	M16 × 1.5 mm
Protection	IP65 when plugged and screwed down (EN 60529)
Temperature range	-40...+60 °C


Commercial data

Net weight	28
Net weight	28
Weight unit	gram
Basic unit	pc.
Customs tariff number	85366990
Unit (piece)	1
Limited value	1


Comments

Plastic housings with good resistance against chemicals and oils.
The resistance to aggressive media should be individually tested for your application. Further details on request.


Contact layout

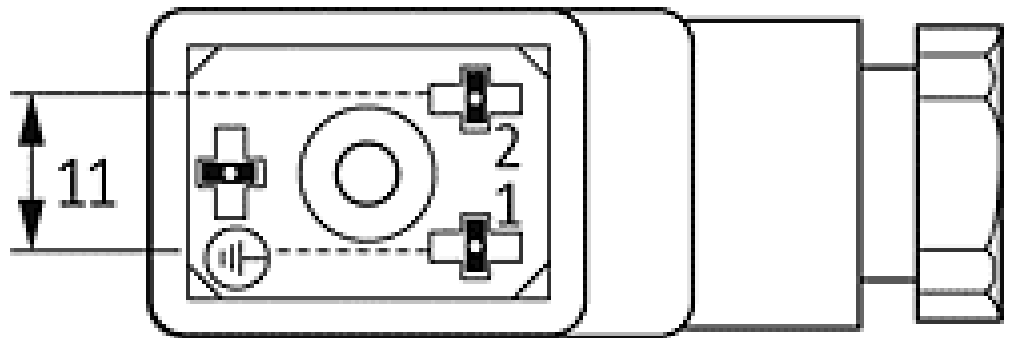

Circuit diagram

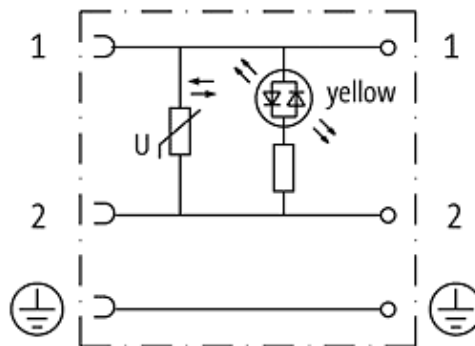

Dimension drawing

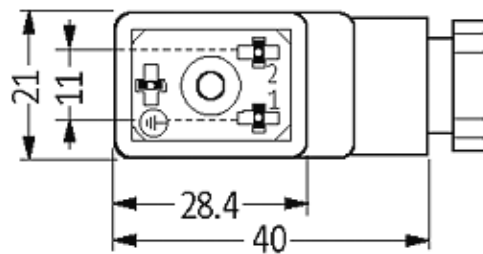

Height: 31 mm