

**SVS Eco LED valve form B 11mm LED+VDR 110V 2+PE field-wireable M16x1,5**

Form B1 (11 mm)  
110 V AC/DC with LED and VDR  
metric

**Image**

Vicarious picture

**Approvals****Form**

29885

**Technical Data**

Operating voltage	110 V AC/DC $\pm 10\%$
Operating current per contact (40 °C)	max. 1.5 A
Connection diameter	0.5...1.5 mm <sup>2</sup>
Clamping range (cable diameter)	6...8 mm
Contact figure	Cable outlet can be turned in 180° steps
Compression gland	M16 × 1.5 mm
Protection	IP65 when plugged and screwed down (EN 60529)
Temperature range	-40...+60 °C


**Commercial data**

Net weight	28
Net weight	28
Weight unit	gram
Basic unit	pc.
Customs tariff number	85366990
Unit (piece)	1
Limited value	1


**Comments**

Plastic housings with good resistance against chemicals and oils.  
The resistance to aggressive media should be individually tested for your application. Further details on request.


## Contact layout

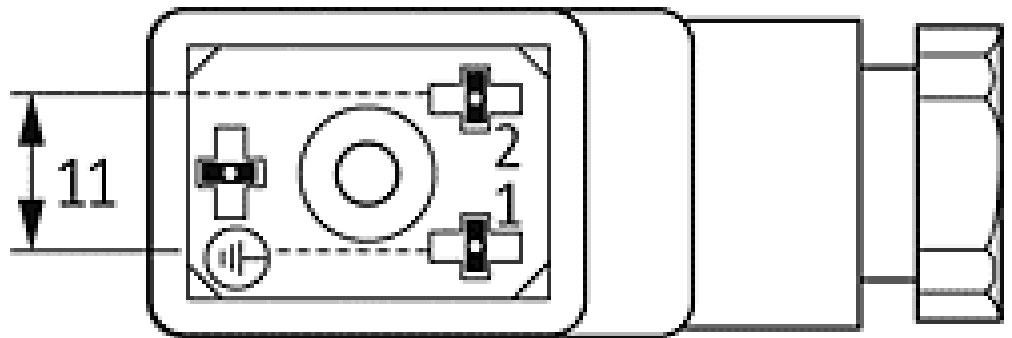

## Circuit diagram

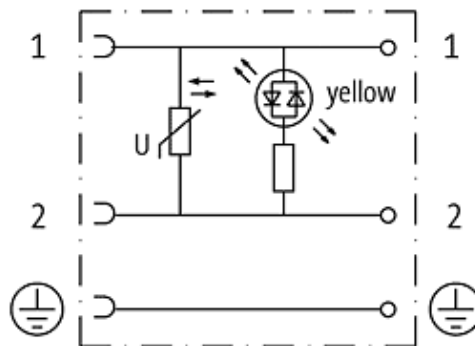

## Dimension drawing

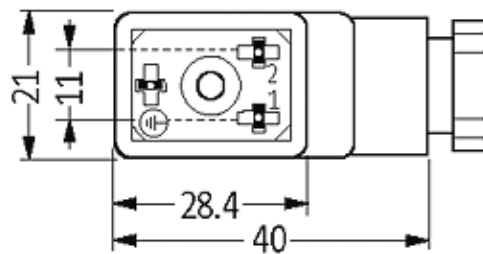

Height: 31 mm