


M12 male 90° / MSUD valve form BI 10mm PVC-JZ 3x0,75 yellow 0,3m

Form BI (11 mm) ? M12, male 90°

LED and suppression

3-pole

## Image

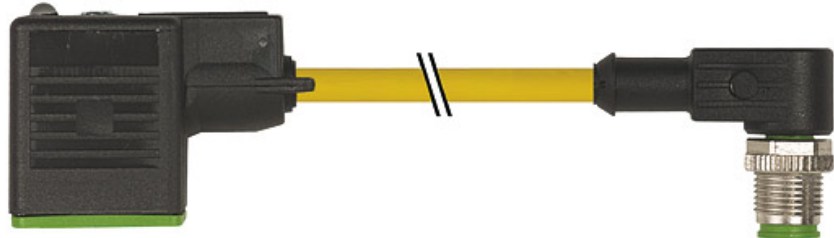

Vicarious picture

## Approvals



## Form

40981

## Technical Data

Operating voltage	24 V AC/DC
Operating current per contact (40 °C)	max. 4 A
Switch off spike	<= 55 V
Switch off delay time	<= 20 ms
LED display	(yellow)
Current consumption	approx. 12 mA
Housing	Plastic, black (gray on request)
Temperature range	-25...+85 °C, depending on cable quality

## Cable

No./diameter of wires	3 x 0.75 mm <sup>2</sup>
Wire isolation	PVC (bk, num, gnye)
C-track properties	Max. Externe Vorsicherung 20 A (T) in der Gebäudeinstallation
Jacket	PVC
Outer diameter	approx. 5.9 mm
Bend radius (mobile)	10 x outer diameter
Temperature range (fixed)	-30...+70 °C
Temperature range (mobile)	-5...+70 °C

All data on this data sheet was compiled carefully.

Liability regarding correctness, completeness, and actuality is limited to gross negligence. Created: 06/12

**Commercial data**


Net weight	63
Net weight	63
Weight unit	gram
Basic unit	pc.
Customs tariff number	85444290
Unit (piece)	1
Limited value	1

**Comments**

Further cable lengths on request.  
Plastic housings with good resistance against chemicals and oils.  
The resistance to aggressive media should be individually tested for your application. Further details on request.

## Contact layout


## Female

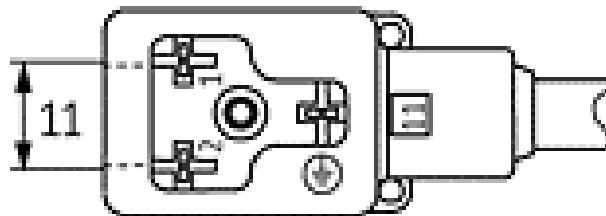

## Ma



## Circuit diagram

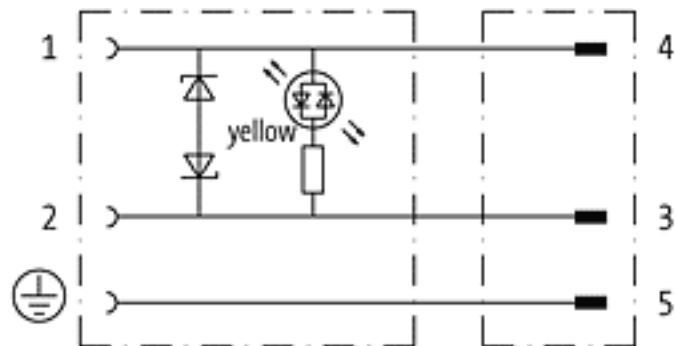

Representante oficial de:



[Argentina – Uruguay – Paraguay – Bolivia – Colombia – y Perú.]



Calle 49 N° 5764 - Villa Ballester (B1653AOX) - Prov. de Buenos Aires - ARGENTINA  
Tel: (+54 11) 4768-4242 / Fax: (+54 11) 4849-1212  
Mail: [ventas@nakase.com.ar](mailto:ventas@nakase.com.ar) / Web: [www.nakase.com.ar](http://www.nakase.com.ar)

